

Please Print

Officer's Full Name: _____ Badge No.: _____

Department: _____ Telephone No.: () _____

Shipping Address: _____

City: _____ State: _____ Zip: _____ Distributor's Name _____

Measured By: _____ Date Of Measuring _____

BALLISTIC/STAB TYPE

NIJ-06 Unstructured:

- Summit SM01
- Summit MN01
- Other _____

NIJ-06 Structured:

- Summit SM01F
- Summit MN01F
- Other _____

NIJ 2005 IR:

- Summit
- Monarch 329
- Other _____

**NIJ Standard-0115.00/
NIJ Standard-0101.06:**

- Prism MT21
- Prism MT01

**NIJ 2005 IR/
NIJ 0115.00:**

- Summit MT

Threat Level: IIA II IIIA

Spike: Spike 1(PS-1.0) Spike 2 (PS-2.2) Spike 3 (PS-3.0)

Comments: _____

OVERLAP

- Butt Fit
- 1" Overlap
- 2" Overlap

CARRIER INFORMATION

- Apex
- Apex FRP*
- SPA+
- SPA+ FRP*

* FRP indicates carrier is equipped with front and rear plate pockets.

Carrier Colors: White Tan Navy Black Brown Olive Gray

Other: _____

HEIGHT: _____ ft. _____ ins.

WEIGHT: _____ lbs.

WAIST: _____ ins.
(widest circumference in between chest and top of duty belt)


INSEAM: _____ ins.

FULL CHEST: _____ ins.
(full circumference across apex)

BRA/CUP SIZE: _____
 For sports bra, check here if you would like cup size reduced by one full size.

All measurement points listed below refer to the illustration.

THE FOLLOWING MEASUREMENTS SHOULD BE TAKEN STANDING

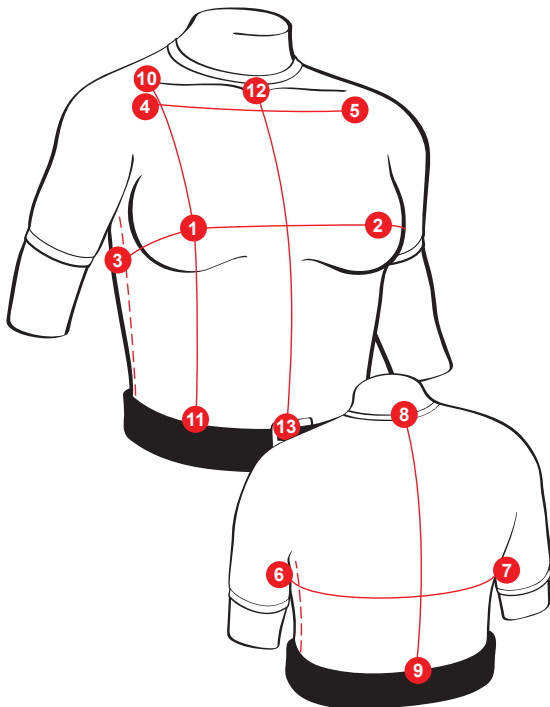

1 - 2 POINT TO POINT
 Using a straight ruler, measure from mid-breast point to mid-breast point. _____ ins.

1 - 3 POINT TO SIDE SEAM
 Using a straight ruler, measure from center side seam to the mid-breast point at an angle. _____ ins.

4 - 5 UPPER CHEST WIDTH
 Using a soft tape measure, extend the arms forward and measure from bra strap to bra strap 1" under the clavicle notch. _____ ins.

6 - 7 UPPER BACK WIDTH
 Using a soft tape measure, identify the widest area across the back and measure from side seam to side seam. _____ ins.

8 - 9 BACK LENGTH
 Using a soft tape measure, identify the bottom edge of the shirt collar and measure from the bottom of the shirt collar to the top of the duty belt. Multiply that measurement by .80 (80%).

BACK MEASUREMENT _____ x .80 = BACK LENGTH _____ ins.

THE FOLLOWING MEASUREMENTS SHOULD BE TAKEN SEATED

1 - 10 SIDE FRONT TOP TORSO
 Identify the top edge of the clavicle bone. Placing the tape measure under the bone, measure down to the breast point. _____ ins.

1 - 11 SIDE FRONT BOTTOM TORSO
 Using a straight ruler, begin at the mid-breast point and measure down to the top of the duty belt. Subtract 1" from this measurement.

BOTTOM TORSO _____ - 1" = SIDE BOTTOM TORSO _____ ins.

12 - 13 FRONT CENTER TORSO
 Using a soft tape measure, identify the sternum notch and measure down to the top of the duty belt. Subtract 1" from this measurement.

FRONT CENTER TORSO _____ - 1" = FRONT CENTER TORSO _____ ins.